


# Combi-Cam®

The original with years of quality/reliability

## Instructions for setting your personal combination:

- The combination is factory set at >>0-0-0<<
- If lock is installed, set combination with door/drawer in open position
- Combination must be on opening number prior to resetting
- On underside outer edge of lock there is a hole for code reset button. Rotate face of cam until code reset button comes into view.
- Push this pin in with a paper clip or thumb tack **and keep it pushed in**
- Set your personal combination by turning dials to desired combination – starting with dial marked '1', and moving to '2', '3', and then '4'.
- Release reset button and combination is set.
- To lock, rotate lock to "locked" position. Rotate one or more dials after lock is closed.  
To open lock, turn dials to your personal combination.

*If testing in your hand, not installed, be sure to tightly grab flat sides of cylinder and then turn as the head and cam (arm) move together when unlocked.*



NOTE: If you desire, Combi-Cam can be installed such that it is non-resettable by end-user.


## Directions:

- Take off screw to cam and remove cam & "stop cam"
- Rotate cylinder 180 degrees and then put "stop cam" and cam back on.

## Precautions to take not to get locked out during setup:

1. Confirm all four dials are at code you intended prior to releasing change button. As you set later dials, you can accidentally shift prior dials.
2. While setting the lock, do not release the change pin. If you release pin and start turning a dial, combination would be that code at moment you briefly let go.

## Other Combi-Cams:

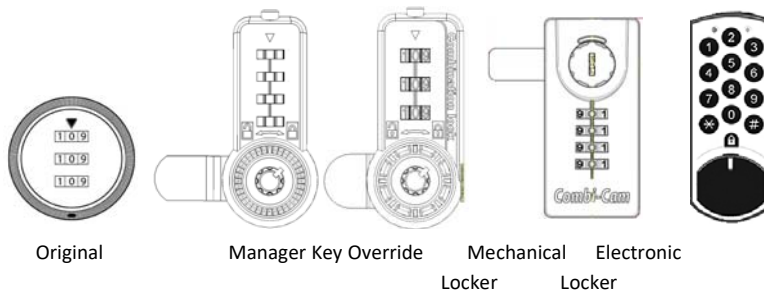

Division of

FJM Security Products

[www.fjmsecurity.com](http://www.fjmsecurity.com)

[www.combi-cam.com](http://www.combi-cam.com)

Support:

[combi-cam.com/support.htm](http://combi-cam.com/support.htm)